


The ISN Advantage

Keypad and Display Module may be disconnected and connected with power applied.

	ON	OFF
CS	50	19.2
64		
32		
16		
8		
4		
2		
1		
Total of ON values (Network Address)		

Network Node Switch (sets node address on the network and communications speed)

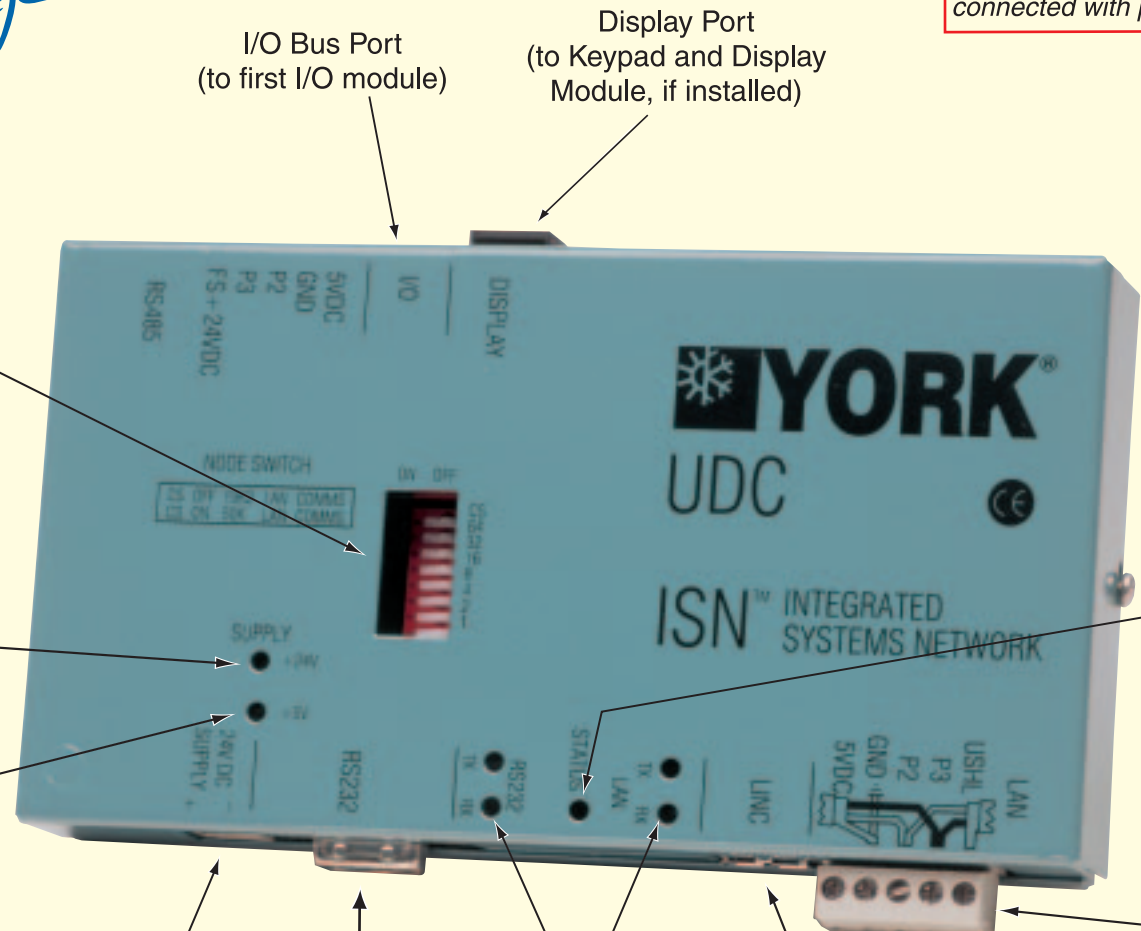

+24 V LED (When lit indicates 24 VDC available for I/O Bus)

+5 V LED (When lit indicates 5 VDC available for LAN and processor)

Status LED (Indicates operational state of unit)

LAN Port (RS485) (to next controller)

Record SN:
Date:

Power Supply Input (24 ±10% VDC)

Port 2 (RS232) (to optional modem or for connecting a PC)

Communication LEDs (TX indicates Transmitting and RX indicates Receiving)

LINC Port (for connecting a Universal LINC)

Processor Module for UDC

